








printed on: 29-12-2024





Media type	INORGANIC FIBERGLASS
Efficiency	20 μ m _(c) β x ≥ 200
Efficiency 1	22 μ m _(c) β x ≥ 1000
Max working pressure	14 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	SPARE GASKETS INCLUDED

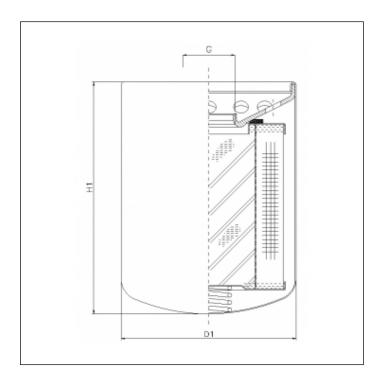

OVERALL DIMENSIONS

D1	128,0 mm
H1	266,0 mm
G	1 1/2"-16 UN

Technical information may change without notice. Image and drawing are representative only