


D771G10A

printed on: 11-12-2024



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	21 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	O-RING AND ANTIEXSTRUSION RING PROVIDED

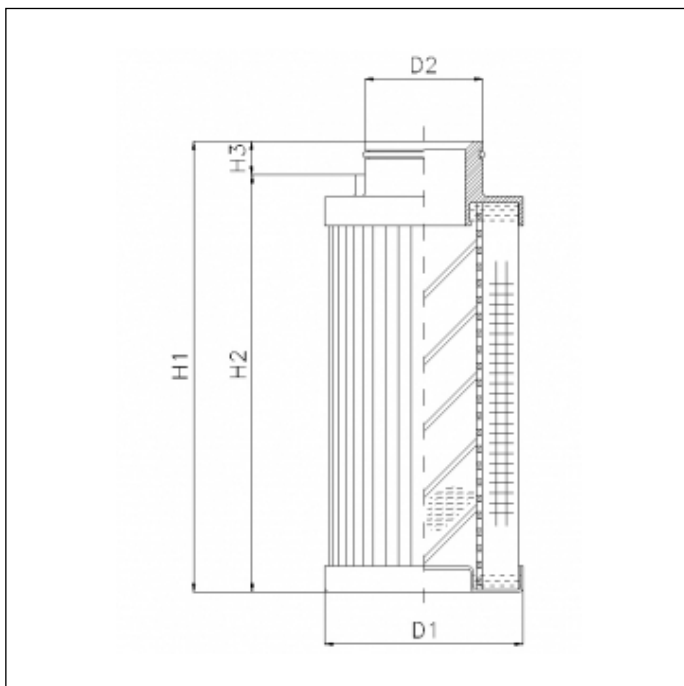

OVERALL DIMENSIONS

D1	67,0 mm
D2	35,7 mm
H1	244,0 mm
H2	234,0 mm

Technical information may change without notice. Image and drawing are representative only