


DHD95G10V

printed on: 20-10-2024



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Seals	FKM
Temperature range	-25°C +120°C

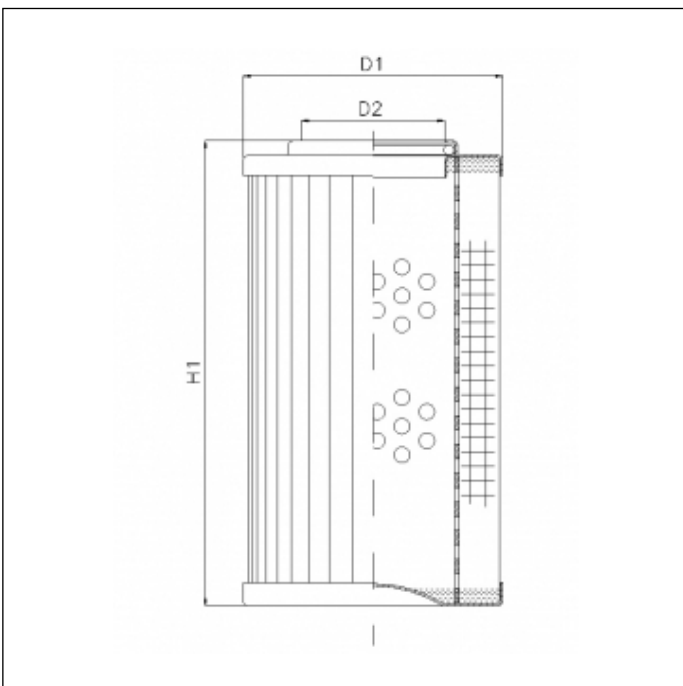

OVERALL DIMENSIONS

D1	56,3 mm
D2	25,5 mm
H1	210,0 mm

Technical information may change without notice. Image and drawing are representative only