


RHR160G20B3/AB1

printed on: 24-01-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

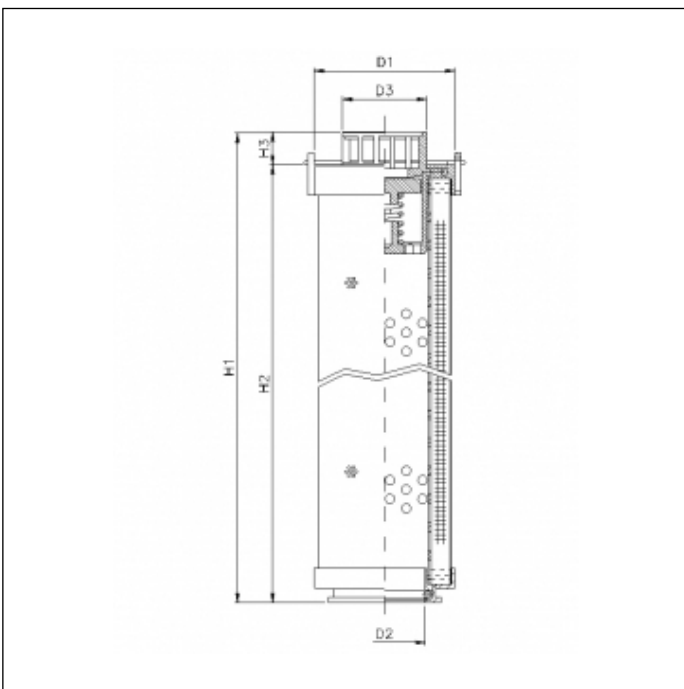

OVERALL DIMENSIONS

D1	73,5 mm
D2	34,2 mm
D3	36,0 mm
H1	144,0 mm
H2	130,0 mm
H3	14,0 mm

Technical information may change without notice. Image and drawing are representative only