


RMR438E20B

printed on: 20-09-2024



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Seals	NBR
Temperature range	-30°C +100°C

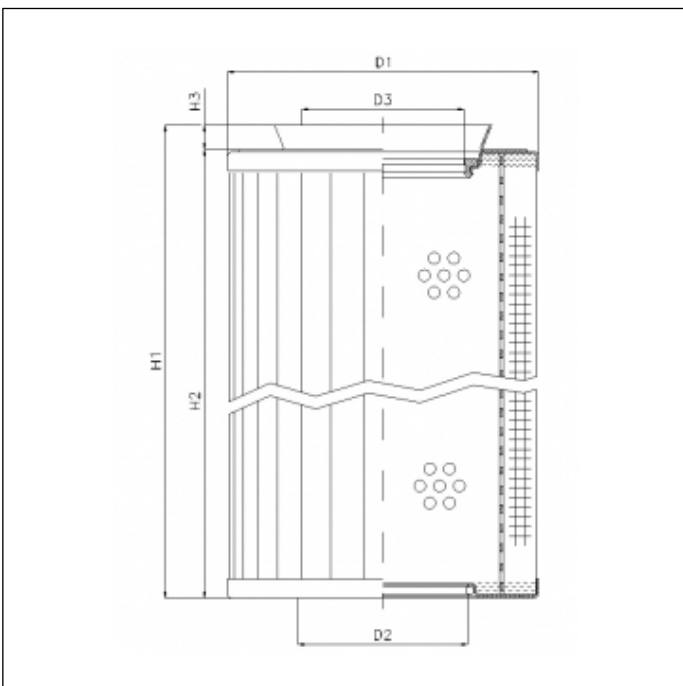

OVERALL DIMENSIONS

D1	99,0 mm
D2	52,5 mm
D3	49,0 mm
H1	159,0 mm
H2	152,0 mm
H3	7,0 mm

Technical information may change without notice. Image and drawing are representative only