









printed on: 31-08-2024

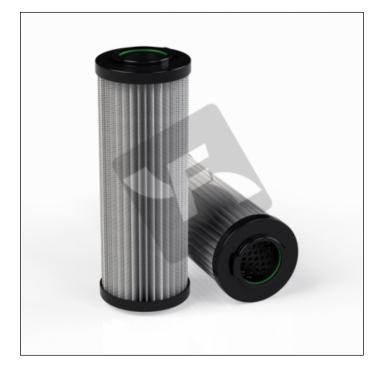

## **TECHNICAL INFO**

Media type	INORGANIC FIBERGLASS
Efficiency	$5 \mu m_{(c)} βx ≥ 200$
Efficiency 1	$7  \mu m_{(c)}  \beta x \ge 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Seals	FKM
Temperature range	-25°C +120°C

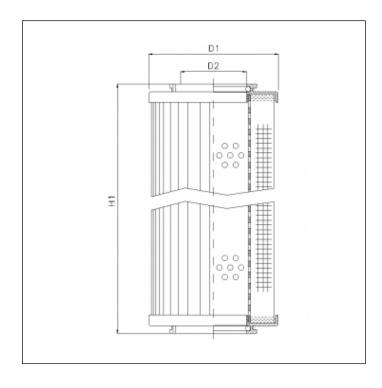

## **OVERALL DIMENSIONS**

D1	94,5 mm
D2	48,1 mm
H1	265,0 mm

Technical information may change without notice. Image and drawing are representative only