



Single stage vacuum generator G1/4"


Ordering code
19M14.S.10.SS.R0

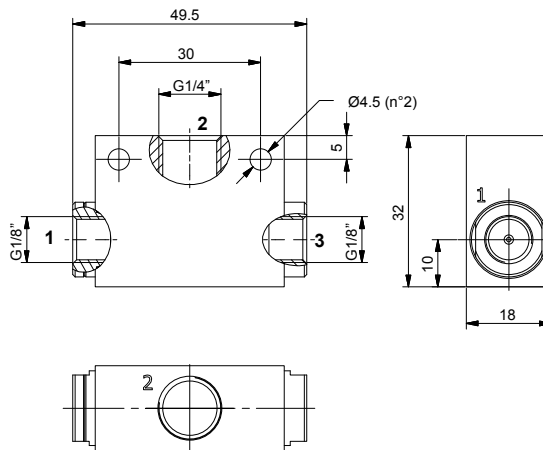

Single stage generators, robust and reliable, with compact dimensions and suitable for applications which need the required degree of vacuum to be reached quickly with limited air flows. Operating on the Venturi principle they have the vacuum connection orthogonal to the axis of supply and outlet. They can be connected directly to the suction cups and/or suction cup holder and applied in any position.

VACUUM GENERATORS

Operational characteristics			
Inlet pressure (bar)	2	4	6
Degree of Vacuum (-kPa)	35	68	85
Intake flow rate (l/min)	35	43	48
Air consumption (l/min)	25	43	62

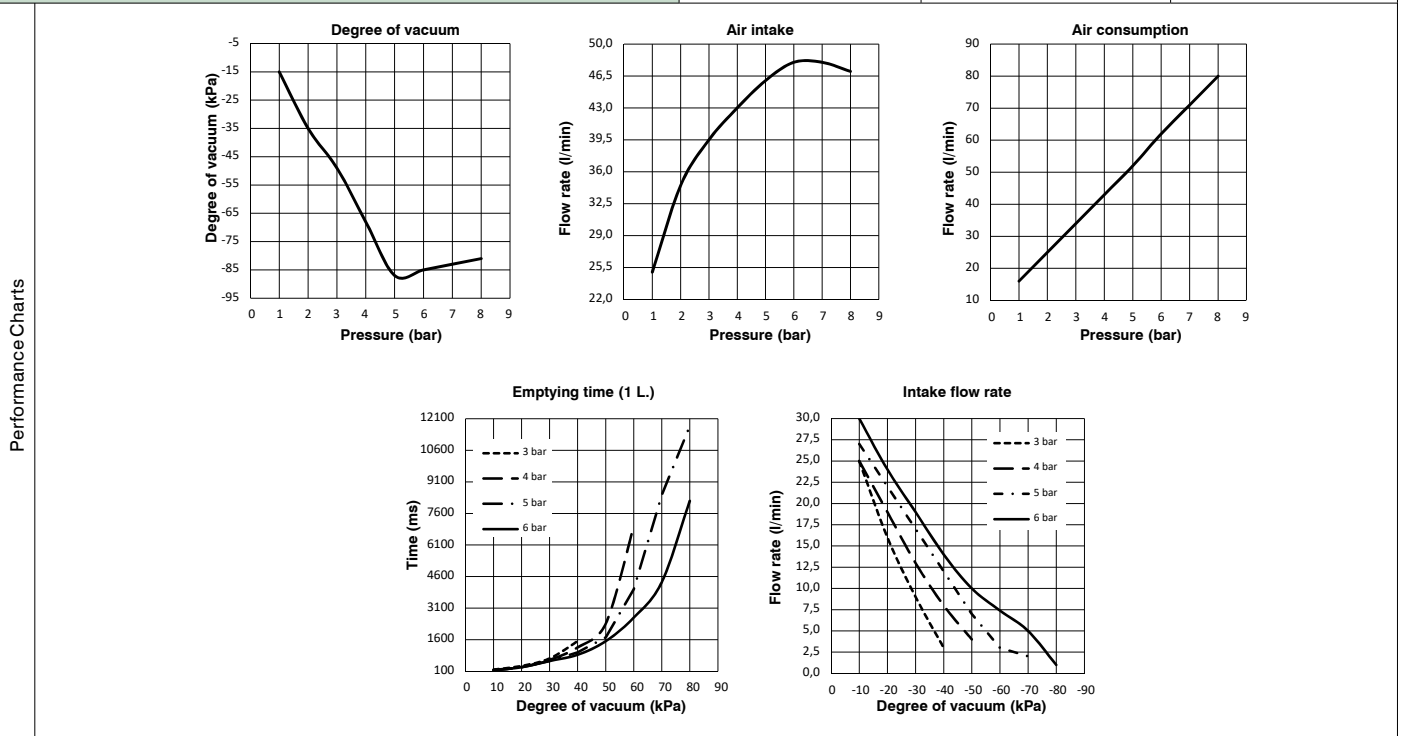

Technical characteristics	
Fluid	Unlubricated filtered air
Pressure (bar)	1 ... 8
Temperature (°C)	-10 ... +80
Weight (g)	55

Accessories	
19S18.S	Silencer G1/8"